



| ITEM | DESCRIPCIÓN | CANTIDAD | UNIDAD |
|------|-------------|----------|--------|
| 1    | ...         | ...      | ...    |
| 2    | ...         | ...      | ...    |
| 3    | ...         | ...      | ...    |
| 4    | ...         | ...      | ...    |
| 5    | ...         | ...      | ...    |
| 6    | ...         | ...      | ...    |
| 7    | ...         | ...      | ...    |
| 8    | ...         | ...      | ...    |
| 9    | ...         | ...      | ...    |
| 10   | ...         | ...      | ...    |



**CUADRO DE GANCHOS Y TRASLAPOS MÍNIMOS**

| METRO | TIPO DE GANCHO | TIPO DE TRASLAPADO |
|-------|----------------|--------------------|
| 0.5   | ...            | ...                |
| 1.0   | ...            | ...                |
| 1.5   | ...            | ...                |
| 2.0   | ...            | ...                |
| 2.5   | ...            | ...                |
| 3.0   | ...            | ...                |
| 3.5   | ...            | ...                |
| 4.0   | ...            | ...                |
| 4.5   | ...            | ...                |
| 5.0   | ...            | ...                |

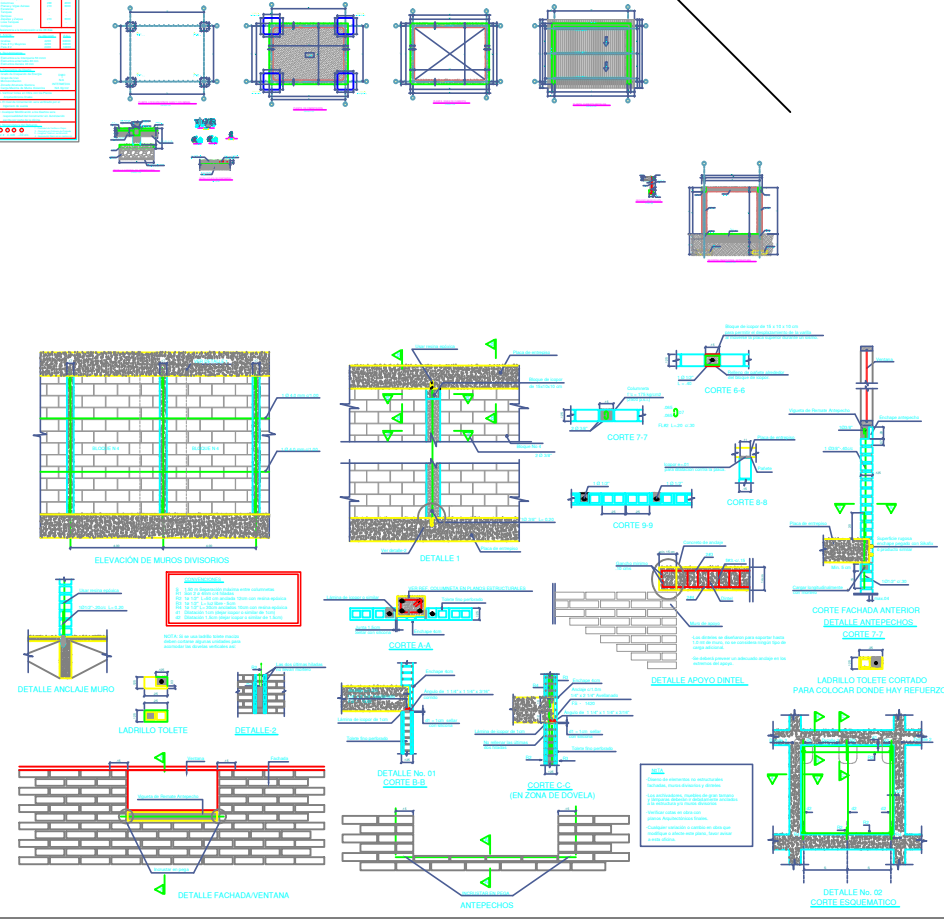

**NOTA:**  
 1. Se debe utilizar mortero de cemento y arena.  
 2. El mortero debe ser aplicado en espesor de 10 mm.  
 3. Se debe utilizar ladrillo de cerámica.  
 4. Se debe utilizar alfileres de acero inoxidable.  
 5. Se debe utilizar alfileres de acero inoxidable.  
 6. Se debe utilizar alfileres de acero inoxidable.  
 7. Se debe utilizar alfileres de acero inoxidable.  
 8. Se debe utilizar alfileres de acero inoxidable.  
 9. Se debe utilizar alfileres de acero inoxidable.  
 10. Se debe utilizar alfileres de acero inoxidable.